

doona™

X™


Doona X

User Guide

Weight: 4-30 lbs (1.8-13.6 kg)

Height: 17-32 in (43-81 cm)

Language: English

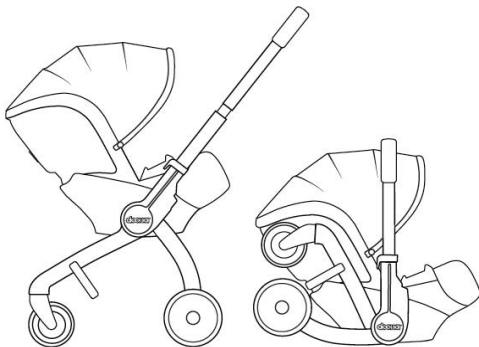

KEEP THIS USER GUIDE FOR FUTURE USE.
STORE IN COMPARTMENT AT THE BOTTOM OF THE PRODUCT.

Table of Contents

01. Safety Warnings	7-10
02. Certifications	11
03. Aircraft Installation	12
04. Registration & Recall	13
05. Use Requirements	14-15
06. Doona X Overview	16-19
07. Use Modes	20-24
7.1. Adjusting the rotation angle of the handle	25
7.2. Extending and retracting the handle	26-27
7.3. Stroller recline positions and rear wheel brake	28
7.4. Rear Wheel Brakes	29
7.5. Folding the Doona X	30-31
08. Securing Your Child in the Doona X Car Seat	32-33
8.1. Infant Insert use	34-35
8.2. Harness use	36-37
8.3. Securing your child with the harness	38-39
09. Selecting a Vehicle Seating Position	40-41
10. Vehicle Seat Belts	42-44
10.1 Compatible Vehicle Belts	42-44
10.2 Incompatible Vehicle Belts	44-45

11. Installing with a Base _____	46
12. Installing without a Base _____	47-49
12.1. Lap-Shoulder Belt European Installation (preferred) _____	50-52
12.2. Lap-Shoulder Belt Standard Installation _____	53
12.3. Lap-Belt Installation (Aircraft) _____	54
12.4. Correct Installation Checklist – Without a Base _____	55-56
13. Care and Maintenance _____	57
13.1. Re-Use after a Crash _____	58
13.2. Sunshade Removal _____	59-60
13.3. Headrest cover and shoulder pads removal _____	61
13.4. Removing the backrest cover _____	62-63
13.5. Removing the Leg Rest cover _____	64
13.6. Installing the headrest and shoulder pads _____	65
13.7. Installing the Backrest cover _____	66
13.8. Installing the Legrest cover _____	67-68
13.9. Installing the sunshade _____	69-70
13.10. Cleaning and washing the seat covers _____	71-72
13.11. Harness straps and buckle care _____	73
13.12. Replacement parts and storage _____	74
14. Accessories _____	75
15. Two-Year Warranty _____	76-77
16. Warranty Card _____	78

Congratulations!

Thank you for choosing Doona's Car Seat as your child's safety and mobility solution.

- In order to protect your child, the Doona X Car Seat must always be used and installed as described in this user guide.

- **IMPORTANT!** Keep instructions for future use.

Store in compartment at the bottom of the product.

Read carefully before use.

Death or serious injury can occur if you do not follow these instructions and the warnings provided on the car seat.

- If you have any questions regarding its use, feel free to contact your local distributor:

SP DISTRIBUTION, LLC.
10100 NW 25th STREET
SUITE 201
MIAMI FL 33172
USA

Customer Service:
Tel: +1 (844) 477-9539
E-mail: info.usa@doona.com

01. Safety Warnings

WARNING

DEATH OR SERIOUS INJURY CAN OCCUR

- Read all instructions on the car seat, in this user guide, and the instructions in your vehicle manual before using the Doona X Car Seat.
- NEVER allow others to use or install the Doona X Car Seat before they read the instructions in this user guide and the child restraint installation instructions in their vehicle manual.
- Use only in a rear-facing position when used in a vehicle.
- Always secure the Doona X Car Seat in the vehicle with the vehicle belt or by attaching it to the Doona X Base, secured with a vehicle belt or Latch/rigid lower anchor attachment as instructed in the Doona X Base user guide, even when not occupied.

An unsecured Doona X Car Seat can injure other occupants in the vehicle in the event of a crash or sudden stop.

- NEVER put your child in a used infant car seat unless you know its history. A seat may be damaged or have been in a severe crash and have damage that is difficult to see.
- DO NOT use accessories on the Doona X Car Seat unless they are made by Simple Parenting and approved for use with the Doona X Car Seat. Non-approved parts and accessories may degrade the performance of the Doona X Car Seat in case of a sharp turn, sudden stop, or a crash.
- DO NOT use the Doona X Car Seat when your child's weight is over 30 lbs (13.6 kg), or if the child's height is over 32 Inches, or if the top of the child's head is less than 1 inch (2.5 cm) from the top edge of the Doona X Car Seat.
- Snugly adjust the belts provided with the Doona X Car Seat around your child.
- Secure this child restraint with the vehicle's child restraint anchorage system, if available, or with a vehicle belt.
- NEVER use the Doona X Car Seat on a vehicle seat with an active frontal airbag!

- NEVER use the Doona X Car Seat to transport more than one child.
- NEVER use this car seat after a crash unless crash and car seat meet ALL conditions in "Re-Use After A Crash" section.
If any conditions are not met, then it must be replaced.
- DO NOT make any alterations or additions to the Doona X Car Seat. Only the manufacturer is permitted to make modifications to the Doona X Car Seat.
- Properly secure luggage or other objects in the vehicle that may cause serious injury or death in the event of a sharp turn, sudden stop or crash.
- NEVER leave your child unattended.
- Stay near and watch child during use.
This product is not safe for unsupervised use or unattended sleep.
- Suffocation Hazard: Children have suffocated on pillows, blankets and extra padding. NEVER add soft bedding or padding.
- IMPORTANT! Prevent damage to your Doona X Car Seat and your vehicle; Check that all Doona X Car Seat parts are installed as instructed to prevent them from getting caught in doors or moving seats.

- Read and follow this user guide and the warnings labeled on the Doona X carefully before attempting to secure your child in the Doona X Car Seat.
Failure to follow them may lead to DEATH OR SERIOUS INJURY.
- Use caution around escalators, automatic doors, elevators, and moving walkways, and keep the harness adjustment strap away from moving parts.
- It is recommended to cover the Doona X Car Seat when left in the car parked in the sun, as plastic and metal parts may become extremely hot.
- Do not hang toys on the Doona X Car Seat handle.

02. Certifications

Aircraft approved

This Restraint is Certified for Use in Motor Vehicles and Aircraft.

The Doona X conforms to all applicable Federal Motor Vehicle Safety Standards. The Doona X is certified to FMVSS 213a and 213b. The Doona X has been designed, tested, and certified according to the US safety standards and regulations. The Doona X is certified for use in all passenger cars, including SUV's, crossovers, vans, and light trucks. Registered patents and designs : www.doona.com/ip



03. Aircraft Installation

Before arriving at the airport with the Doona X Car Seat, please contact the airline regarding suitability and transport conditions in advance. The use of the Doona X Car Seat is allowed only on a plane with a 2-point (lap belt only) seat belt.

DO NOT use the Doona X Base on an aircraft, only the Doona X car seat is certified for aircraft use.

For detailed instructions on installation and use of the Doona X Car Seat in aircrafts, please refer to the instructions on securing the Doona X Car Seat using the Lap-Belt Installation (Aircraft) as described further in this user guide in Section 12.3.

04. Registration & Recall

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in case of a recall. Send your name, address, email address (optional), phone number (optional), and the restraint model number and manufacturing date to:

SP DISTRIBUTION, LLC.
10100 NW 25th STREET, SUITE 201
MIAMI FL 33172, USA



Or call Customer Service at +1 (844) 477-9539
Or register on-line at: www.doona.com/register

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY:1-800-424-9153), or go to www.NHTSA.gov.
Also check the Doona website at: www.doona.com

05. Use Requirements

For rear-facing use only. Use the Doona X Car Seat when your child meets all of the following criteria:

- Weight: 4 to 30 lbs (1.8 to 13.6 kg).
- When the child's height is between 17 - 32 Inches, or the top of the child's head is 1 inch (2.5 cm) or more below the top edge of the Doona X Car Seat.
- When the shoulders are at or just above the harness strap level.

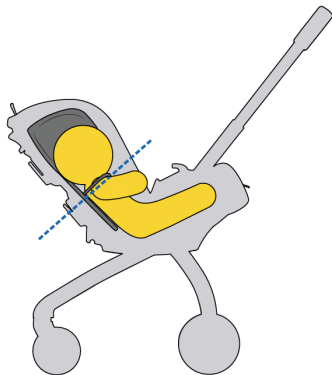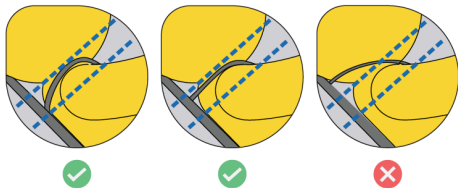

- The American Academy of Pediatrics (AAP) advises to keep children rear-facing until they reach the maximum height and weight as instructed on their car seat for rear facing use. Some states require children be kept rear-facing until 2 years of age. Check your local state law.


Premature/Low Birth Weight Infant Use

IMPORTANT! DO NOT use this child restraint for a premature/low birth weight newborn without consulting your pediatrician or hospital staff.


- Premature/low birth weight infants may have breathing difficulties in a sitting position.
- The AAP recommends babies born preterm should be screened while still in the hospital to make sure they can sit safely in a semi-reclined position.
Observations should be done with the infant properly positioned and the restraint at an appropriate angle as described in these instructions.
- Follow your pediatrician's guidance for travel. Limit trips and time in the restraint.
- For more information, visit: [healthychildren.org/safety-prevention/on-the-go](https://www.healthychildren.org/safety-prevention/on-the-go) described in these instructions.

06. Doona X Overview

- Canopy ①
- Canopy rotation hinge (2x) ②
- Handle ③
- Recliner lever ④
- Handle rotation buttons (2x) ⑤
- Parking brake..... ⑥
- Handle extension button..... ⑦

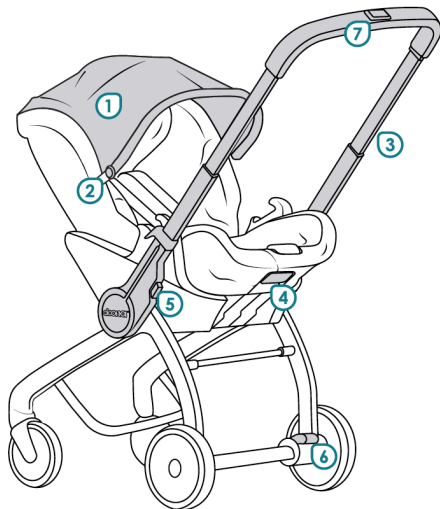


- Folding lever ⑧
- Shoulder belt guide ⑨
- Lap belt guide (2x) ⑩
- Rear wheels release buttons (2x) ⑪
- Front wheels release buttons (2x) ⑫

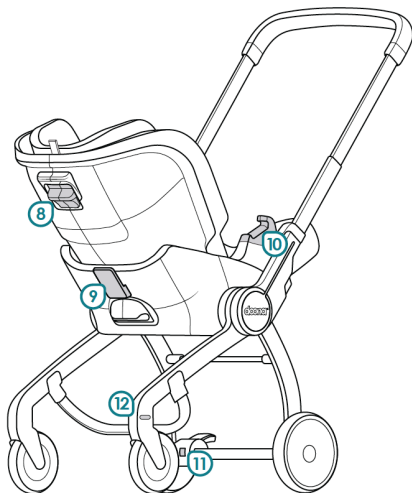


Textile parts

- Headrest height adjustment strap ①
- Headrest..... ②
- Chest clip ③
- Shoulder pads (2x) ④
- Buckle & buckle tongues ⑤
- Buckle release button..... ⑥
- Harness adjustment button..... ⑦
- Harness adjustment strap..... ⑧

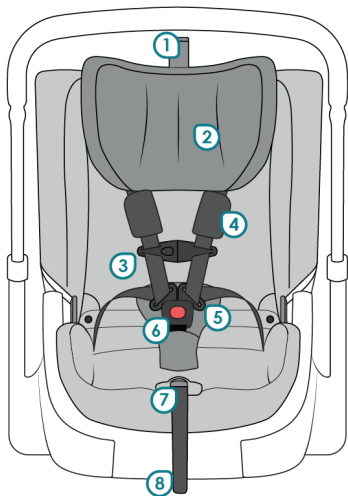

Vehicle belt parts

- Vehicle shoulder belt ①
- Vehicle lap belt ②
- Vehicle seat belt buckle ③
- Vehicle seat buckle tongue ④

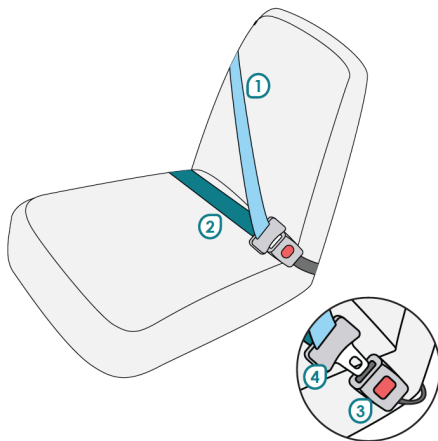

07. Use Modes

WARNING

- ENSURE that the legs and handle are locked in position before attempting to transition between modes.
- The Doona X Car Seat is designed to enable transition between modes while the child is securely restrained in it with the harness. Before attempting to transition between modes with the child in the Doona X Car Seat, practice transitioning the empty product between stroller and carrier modes to see how the product moves during the process.
- To avoid injury, ENSURE your child is properly and securely restrained with the harness in the Doona X Car Seat, or well away from the Doona X Car Seat, while transitioning between modes.
- ALWAYS engage the handle in position C when traveling in a vehicle or on aircraft.
- Remove all bags and accessories from the Doona X Car Seat before transitioning between modes.

The Doona X Car Seat can be folded ONLY when all of the following actions are done simultaneously:

- For leveling the recline angle to sit position see section 7.3. Stroller recline positions.
- Blocking the rear wheel.
- Pressing the safety lock.
- Squeezing the fold release lever.
- Leaning the Doona X Car Seat against the locked rear wheel.

Stroller Warnings:

 WARNING

- Avoid an unstable hazardous condition:
 - Placing or hanging packages or accessories, or both on this product may cause it to become unstable and tip over.
 - Only use approved package carrying accessories.
Do not add excessive weight to the product.
 - Follow the maximum weight recommendations for package carrying accessories approved by Simple Parenting for use with the Doona X Car Seat.

- Avoid serious injury from falling or sliding out.
Always use the harness.
- NEVER leave child unattended.
- Always read warnings and instructions on the accessories provided with the Doona X Car Seat before using them.
- Overloading the Doona X Car Seat can cause it to become unstable and tip over.
- The Doona X Car Seat is not suitable for use while running or skating.
- DO NOT let your child play with the Doona X Car Seat.
- NEVER use the Doona X Car Seat for sleep.
The Doona X Car Seat must only be used to transport a child.
- This product is not safe for sleep or unsupervised use.
If baby falls asleep, remove baby as soon as possible and place baby on a firm, flat sleep surface such as a crib or bassinet.


WARNING

Carrier Warnings:

- Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child.
NEVER place carrier on beds, sofas, or other soft surfaces.
- Children have **STRANGLED** in loose or partially buckled harness straps. Fully restrain the child even when carrier is used outside the vehicle.
- Fall Hazard:
 - Child's activity can move carrier. NEVER place carrier on counter tops, tables, or any other elevated surface.
 - The carrier can fall from shopping cart. Do not use on shopping cart.
- Read all instructions before use of the infant carrier.
- Do not use the infant carrier if it is damaged or broken.
- NEVER leave child unattended.
- Keep instructions for future use.



07. Use Modes

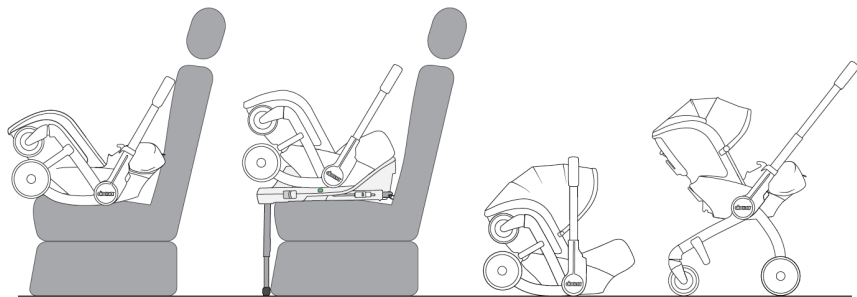

Car seat
(use with vehicle belt)



Car seat
(use with base)



Carrier

Stroller

7.1. Adjusting the rotation angle of the handle


Car Seat and Carrier Modes

Handle rotation - Press the handle rotation buttons (#1) on both sides simultaneously and begin rotating the handle toward the desired position.

Position C - In a vehicle or on aircraft.

Position B - Carrier mode for use outside of the vehicle.

Position A - Packaging and storage mode.

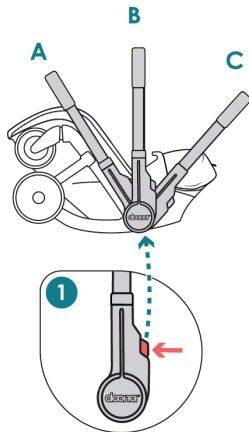

7.2. Stroller mode position

STEP 1. Rotate the handle to position B with the handle's rotation buttons.


STEP 2. Hold the handle with one hand and lift the seat from the ground.

STEP 3. Push in the red safety lock (A) and squeeze the fold release lever up (B) until hearing a "click" sound and the wheels are released and locked in stroller position.

STEP 4. Rotate the handle to position C then extend the handle to Stroller mode: press the handle extension button and pull the handle up until you hear a "click" sound and the handle is locked at its position.

Notice! Extended handle cannot be rotated. To retract handle press the handle extension button.

7.2. Stroller mode position

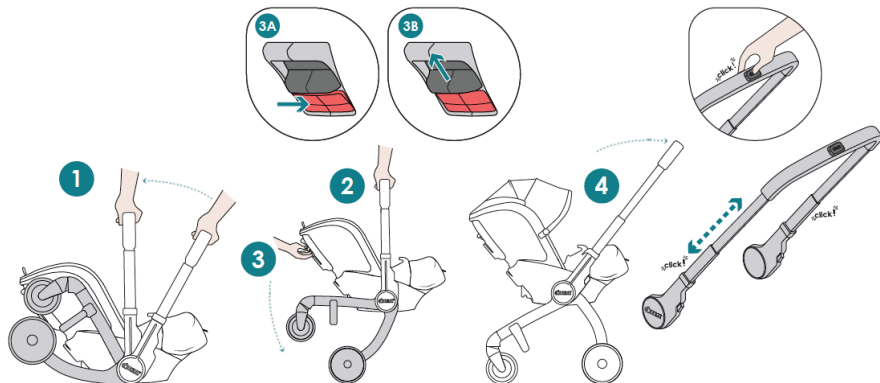

7.3. Stroller mode recline positions

The stroller mode offers three recline positions:


- 1. Seat** – Upright position.
- 2. Relax** – Semi-reclined position.
- 3. Lean Back** – Fully reclined position.

STEP 1: To change the recline position, pull the recline lever.

STEP 2: Move the stroller seat to the desired position until you hear the click.

IMPORTANT!


The recline function is only available in the stroller mode.

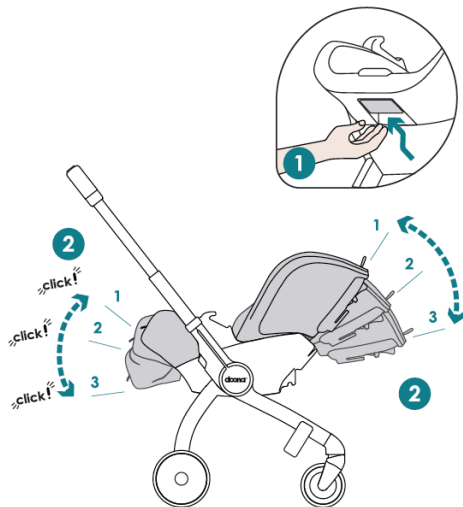

7.4 Rear Wheel Brakes

WARNING

- Always engage the brakes when placing a child in the Doona X car seat or removing a child from the Doona X car seat.
- To apply and release the brakes on both rear wheels, use the brake pedal located next to the right rear wheel.

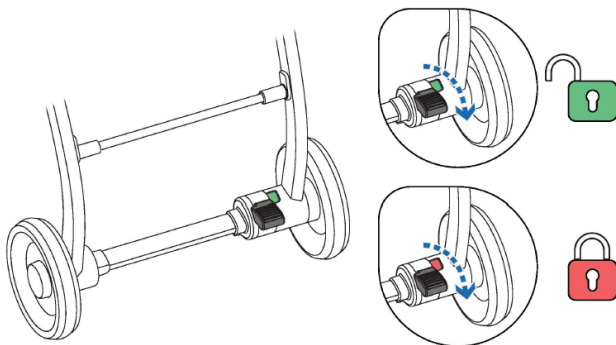


7.5. Folding the Doona X

STEP 1. Lock the rear wheels using the brake pedal.

STEP 2. Retract the handle with the extension button until it locks at its minimum length.


STEP 3. Rotate the handle to position B with the handle's rotation buttons.

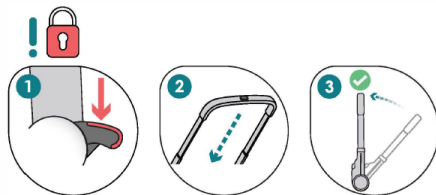

STEP 4. Hold the handle with one hand.

STEP 5. Push in the red safety lock (A) and squeeze the fold release lever (B).

STEP 6. Lean the Doona X Car Seat against the locked rear wheel. You should hear a click when the legs are locked.

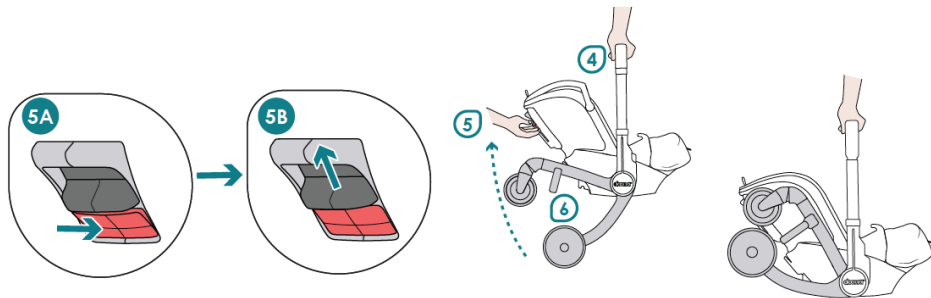

08. Securing Your Child in the Doona X Car Seat

WARNING

- Failure to follow the information provided on the Doona X Car Seat or in the user guide, could result in DEATH or SERIOUS INJURY.
- Use only with children who weigh between 4 and 30 lbs. (1.8 to 13.6 kg) and whose height allows the top of their head to remain at least 1 inch (2.5 cm) below the top edge of the Doona X Car Seat.
- Always properly secure your child with the harness in the Doona X Car Seat.
- Snugly adjust the harness of the Doona X Car Seat around your child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging.
It does not press on the child's flesh or push the child's body into an unnatural position.
- The shoulder straps must be adjusted at or just below the child's shoulders.

- To prevent risk of ejection in a crash:
Make sure that the shoulder straps are not twisted.
Make sure that the headrest is fixed and cannot move through its levelings.
- NEVER leave your child unattended in the Doona X Car Seat in the vehicle. Vehicle interior temperatures can rise or drop to dangerous levels very quickly.
Children have died from heat strokes or hyperthermia because they were left in a vehicle.

8.1. Infant Insert use

WARNING

ALWAYS secure your child in the Doona X Car Seat WITH the Infant Insert if your child weighs below 11 lbs (5 kg) or if your child's shoulders (while seated in the Doona X Car Seat without the Infant Insert) are below the lowest shoulder strap level.

IMPORTANT!


Remove the Infant Insert when your child's shoulders (while seated in the Doona X Car Seat without the Infant Insert) are above the lowest shoulder strap level.

Installing the Infant Insert:

STEP 1: Place the Infant Insert in the seat as shown.

STEP 2: Adjust headrest to lowest position and snap the top of the infant insert to the top of the headrest.

STEP 3: Adjust the harness, harness shoulder pads and buckle so they are on top of the infant insert.

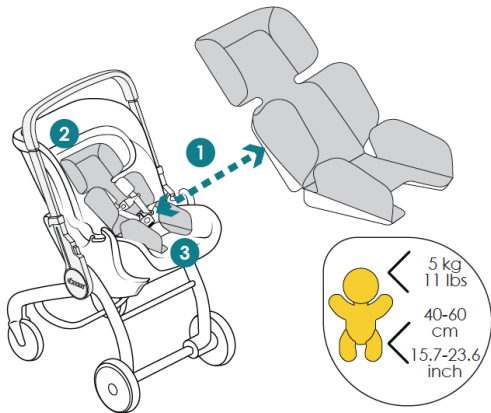

8.2. Harness use


Adjusting the Harness:

Loosening the shoulder straps:

Press the harness adjustment button (1) while pulling both shoulder straps (2) toward you.

Tightening the shoulder straps:






Pull the harness adjustment strap (3) until both the lap straps and the shoulder straps are snug around the child's body.

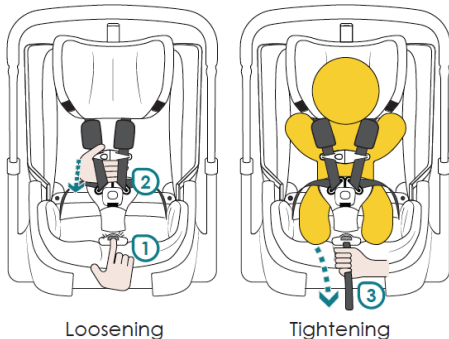

Important! A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

Adjusting the height of the shoulder straps:

Pull the headrest strap (4) and adjust headrest up or down so that the shoulder straps are at or just below the child's shoulders.

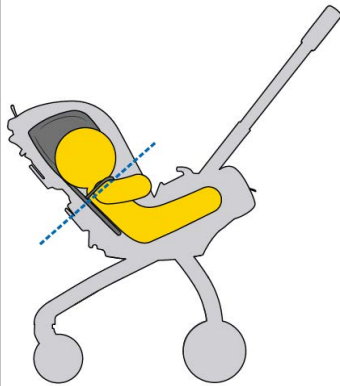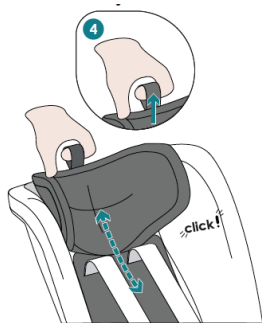

8.3. Securing your child with the harness

STEP 1 - Loosen the shoulder straps

STEP 2 - Place your child in the Doona X Car Seat with their rump against the seat back and bottom as shown.

STEP 3 - Place the harness straps over the child's shoulders



STEP 4 - Buckle the harness

STEP 5 - Fasten the chest clip

STEP 6 - Tighten the shoulder straps

STEP 7 - Pull the shoulder straps

STEP 8 - Repeat step 6

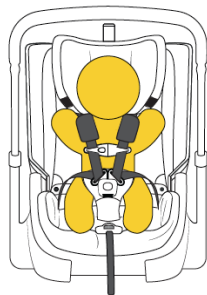

IMPORTANT

- Both buckle tongues must be fully inserted and locked in the buckle for the harness to be buckled properly.
- Pull on the buckle to ensure it is properly locked.
- Simple Parenting recommends always using the shoulder strap pads provided with the Doona X Car Seat.
- Make sure the chest clip is locked and adjusted to the child's armpit level.
- Make sure that shoulder straps are at the same height or just below the child's shoulders.
- Make sure the harness is snugly adjusted around the child.
- A snug strap should not allow any slack.
- Make sure that the shoulder pads are positioned at the top of the child's shoulders.


09. Selecting a Vehicle Seating Position

WARNING

- Read all instructions in this user guide and in the child restraint installation instructions in your vehicle manual before using the Doona X Car Seat. Failure to do so can cause **DEATH OR SERIOUS INJURY**.
- **DEATH OR SERIOUS INJURY** can occur - **DO NOT** place a rear-facing child seat on a front vehicle seat with an air bag.
- The back seat of the vehicle is the safest place for children who are 12 and under.
- **NEVER** allow others to use or install the Doona X Car Seat before they have read and understood the instructions in this user guide and the child restraint installation instructions in the vehicle manual.
- **NEVER** install the Doona X Car Seat on a vehicle seat that is facing the rear or side of the vehicle.
- If your vehicle has a frontal airbag on the passenger side, it **MUST BE DEACTIVATED** before installing a child restraint in that position.

- If your vehicle has seating positions with side airbags, check your vehicle manual for information about installing a child restraint in that position.
- According to accident statistics, children are safer when properly restrained in rear seating positions than in front seating positions.

- ✓ Forward facing vehicle seat
- ✗ Seat with active frontal airbag
- ✓ Seat with lap-shoulder belt
- ✗ Seat with lap belt only
- ✗ Rear-facing vehicle seat
- ✗ Side-facing vehicle seats

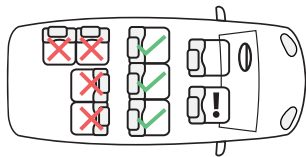

IMPORTANT! Owners of vehicles with front passenger-side airbags should refer to their vehicle owner's manual for child restraint system installation instructions. If your vehicle has a frontal airbag, it **MUST BE DEACTIVATED** before installing a child restraint in that position.

10. Vehicle Seat Belts

10.1 Compatible Vehicle Belts

1. Combination lap-shoulder belts with free sliding latch plates.

- The retractor on most lap-shoulder belts with free sliding latch plates can be locked. Lap-shoulder belts with lockable retractors can be used with a car seat. Pull the vehicle belt all the way out, then let it feed back in about 12 inches and pull out again. If the belt cannot be pulled back out, the retractor is locked.
- If the retractor cannot be locked, a locking clip will be needed in order to install a car seat with this vehicle belt, contact your local Simple Parenting distributor to request one.

2. Combination lap-shoulder belts with locking latch plates.

Locking latch plates hold a car seat secure by keeping the lap belt locked unless the latch plate is tilted.

3. Inflatable lap-shoulder belts in Ford and Lincoln vehicles can be used to secure the Doona X Infant Car Seat.

For Installation without base, follow instructions for lap-shoulder belt standard installation in section 12.2. Most inflatable vehicle belts are labeled.

4. Lap belts with locking latch plates (Aircraft Use Only).

Manually adjustable lap belts typically secure a car seat tightly. However, in some cases, the locking latch plate may loosen if positioned at certain angles. If this occurs:

1. Unbuckle the belt.
2. Flip the latch plate over.
3. Re-buckle to ensure a secure fit.

IMPORTANT!

Vehicle belts forward of the seat bight or crease do not always allow for a secure installation. Check that Doona X Infant Car Seat stays securely installed as instructed in the installation section. DO NOT install with a vehicle belt that does not allow a secure installation.

WARNING

Doona X Infant Car Seat must stay securely installed.

If Doona X Infant Car Seat cannot be installed securely or will not stay securely installed, try installing in a different vehicle seating position or with the base and the vehicle's child restraint anchorage system (LATCH). Not all vehicle belts can be used with child restraints.


Check your vehicle owners manual for information on installation of child restraints in the vehicle seating position chosen.

10.2 Incompatible Vehicle Belts

WARNING

NEVER install the Doona X Infant Car Seat in a vehicle with the following types of vehicle belts. Check your vehicle manual for information about the vehicle's seat belt type.


- 1.** Vehicle belts that are attached to the door in any way.
- 2.** A vehicle belt that moves along a track automatically to restrain the passenger when the door is closed.
- 3.** Inflatable seat belts or seat belts with airbags in vehicles from manufacturers other than Ford and Lincoln. Most vehicle belts with airbags are labeled.
- 4.** Do not install with a vehicle belt that is Lap Belt Only.
- 5.** Combination lap-shoulder belt with two ELRs.
Lap Shoulder belts that have a separate non-locking retractor each for the lap section and the shoulder section.

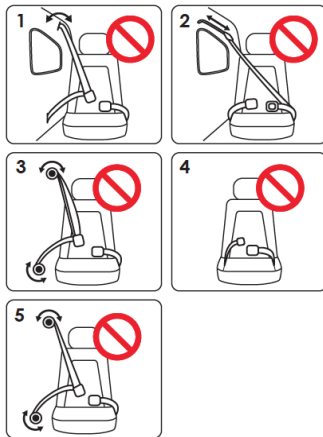

11. Installing the Doona X Car Seat with a Base

WARNING

This user guide does not include instructions for installation with a base. For detailed instructions on how to install the Doona X Car Seat with the Doona X Base, refer to the user guide provided with the Doona X Base.

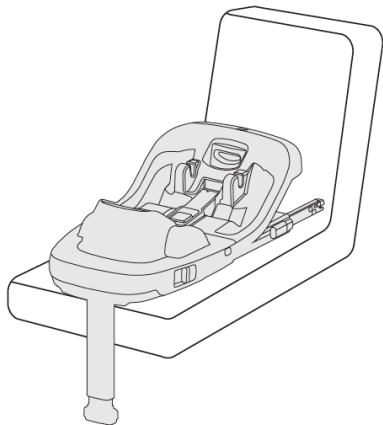

12. Installing the Doona X Car Seat without a Base

WARNING

Ensure child's safety

- Use only in a rear-facing position when using the Doona X Car Seat in a vehicle.
- Always properly secure your child with the harness in the Doona X Car Seat.
- Vehicle seat belt must lock.

Ensure correct installation

- Make sure that the Doona X Car Seat is in car seat mode, with the handle in position C (see page 25 illustration).
- When installed without a base, adjust the Doona X Car Seat position and angle according to the red level line that appears on the side sticker. The red line should be parallel to the ground.
- In lap-shoulder belt installation DO NOT route the shoulder portion of the vehicle belt through the lap belt guides.

- If you cannot achieve a secure installation, try a different vehicle seating position or installing with the Doona X Base. If you have any questions about the installation, contact your local distributor.

General protection

- For the protection of all vehicle occupants - In the case of an emergency stop, or a crash, unsecured persons or objects may cause injury to other vehicle occupants.
ALWAYS check that the Doona X Car Seat is secured when it is in the vehicle, even if no child is being transported.
- To protect your vehicle - Some vehicle seat covers, made from sensitive materials (e.g. velour, leather, etc.), may develop wear marks when car seats are used. This can be avoided by placing the Vehicle Seat Protector under the Doona X Car Seat. The Vehicle Seat Protector is available as an accessory (sold separately).
- Parts and accessories not made by Simple Parenting for use with the Doona X Car Seat may impair the performance of the Doona X Car Seat in the event of a crash. ONLY use accessories made by Simple Parenting for use with the Doona X Car Seat or Base.

NOTE: Simple Parenting recommends installing the Doona X Car Seat only in a rear vehicle seating position. If you must install your seat in a front vehicle seating position, check your vehicle manual to verify that it is safe to install a child restraint in this position. The frontal airbag **MUST** be deactivated.

Determine installation method:

12.1: Lap-Shoulder Belt European Installation (Preferred):

Shoulder portion of the vehicle belt is wrapped around the back of the Doona X.

12.2: Lap-Shoulder Belt Standard Installation:

Follow this method if installing with an inflatable vehicle seatbelt or if the shoulder belt is not long enough to wrap around the back of the Doona X car seat.

12.3: Lap Belt Installation (Aircraft)




Only for installation in aircraft.

12.1. Lap-Shoulder Belt European Installation (preferred).

STEP 1: Place the Doona X Car Seat rear-facing on the vehicle seat.

STEP 2: Place the handle in car seat mode, position C.

STEP 3: Make sure that the vehicle belt is not twisted and then buckle it.





STEP 4: Route the lap portion of the vehicle belt through the lap belt guides located on both sides of the handle.

Important! DO NOT route the shoulder portion of the vehicle belt through the lap belt guides.

STEP 5: Position the Doona X Car Seat so the red level line on the side is level to ground.

STEP 6: Pull the shoulder portion of the vehicle belt to tighten the lap portion of the vehicle belt.



STEP 7: A. Pull the shoulder portion of the vehicle belt, route it around the back of the Doona X Car Seat and thread it through the vehicle shoulder belt guide located at the back of the Doona X Car Seat.

B. Engage the vehicle belt locking mechanism and then feed the excess belt back into the retractor.





STEP 8: Check for a secure installation: grasp the Doona X Car Seat at or near the lap belt path and push side to side and front to back. The car seat should not move more than 1" in any direction.

IMPORTANT!

If the shoulder belt is not long enough to go around the back of the Doona X, please use the Lap Shoulder Belt Standard Installation method (12.2).

IMPORTANT!

See section 12.4 Correct Installation Checklist - Without a Base.



12.2. Lap-Shoulder Belt Standard Installation.



NOTE: Follow this method of installation when installing with an inflatable vehicle seatbelt or if the shoulder belt is not long enough to wrap around the back of the Doona X carrier.

STEPS 1 - 6: To install using lap shoulder belt standard installation method, follow steps 1 through 6 from Section 12.1.

STEP 7: Route the shoulder portion between the Handle and the vehicle seat back. Engage the vehicle belt locking mechanism, then feed the excess belt back into the retractor.

STEP 8: Check for a secure installation: grasp the Doona X Car Seat at or near the lap belt path and push side to side and front to back. The car seat should not move more than 1" in any direction.

IMPORTANT! See section 12.4 Correct Installation Checklist Without a Base.



12.3. Lap Belt Installation (Aircraft)

STEPS 1 - 5: To install using lap belt installation method, follow steps 1 through 5 from Section 12.1.

STEP 6: Tighten the lap belt by pulling on the free end.

STEP 7: Check for a secure installation: grasp the Doona X Car Seat at or near the lap belt path and push side to side and front to back. The car seat should not move more than 1" in any direction.

If the aircraft belt loosens, see guidance in section 10.1 Lap Belts with locking latch plates

IMPORTANT! See section 12.4 Correct Installation Checklist - Without a Base




12.4. Correct Installation Checklist - Without a Base

IMPORTANT!

- Make sure that the Doona X Car Seat is installed rear-facing.
- Make sure to deactivate frontal airbags if you install the Doona X Car Seat on the front passenger seat.
- Make sure the Doona X Car Seat is secured using a lap-shoulder belt or lap belt (in an aircraft) as instructed in this guide.
- Make sure ONLY the lap belt section of the vehicle belt is routed through both lap belt guides located on the handle of the Doona X Car Seat.
- ALWAYS engage the handle in position C when traveling in a vehicle or on aircraft.

- Make sure the red level line on the side sticker on the Doona X Car Seat is parallel to the ground when installed without the base.
- Make sure the seat belt is tightened.
- Vehicle seat belt must lock, otherwise use a locking clip.
- If the Doona X Car Seat cannot be securely installed in a specific seating position, try moving to a different vehicle seating position, or installing with the Doona X base.
- In case the Doona X isn't fitting on a specific seat, try removing the back side stroller wheels when using as a car seat. Do that by pushing the wheel release button.

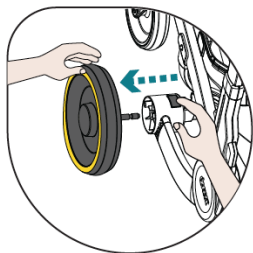

13. Care and Maintenance

WARNING

- NEVER use this car seat after a crash unless crash and car seat meet ALL conditions in “Re-Use After A Crash” section. If any conditions are not met, then it must be replaced.
- Regularly check all parts for damage. Ensure the correct operation of all mechanical components.
- DO NOT use the Doona X Car Seat if it is damaged or broken.
- DO NOT use the Doona X Car Seat without its seat textile pads and covers.
- DO NOT use parts or accessories with the Doona X Car Seat unless supplied or approved by Simple Parenting for use with the Doona X Car Seat.

13.1 Re-Use after a Crash

NHTSA recommends that car seats be replaced following a moderate or severe crash in order to ensure a continued high level of crash protection for child passengers.

Car seats do not automatically need to be replaced following a minor crash.

What defines a minor crash?

A minor crash is one in which ALL of the following apply:

- The vehicle was able to be driven away from the crash site.
- The vehicle door nearest the car seat was not damaged.
- None of the passengers in the vehicle sustained any injuries in the crash.
- If the vehicle has airbags, the airbags did not deploy during the crash; and there is no visible damage to the car seat.

NEVER use a car seat that has been involved in a moderate to severe crash. Always follow manufacturer's instructions.

www.nhtsa.gov/car-seats-and-booster-seats/carseat-use-after-crash




13.2. Sunshade Removal


STEP 1: Pull out the snaps from the canopy hinges.

STEP 2: Unzip the sunshade fabric out of the Doona X car seat back.

STEP 3: Pull out the 2 sunshade snaps from the back of the Doona X car seat Backrest cover.

STEP 4: Pull the sunshade's spine out of the canopy hinges and remove the fabric from the spine.




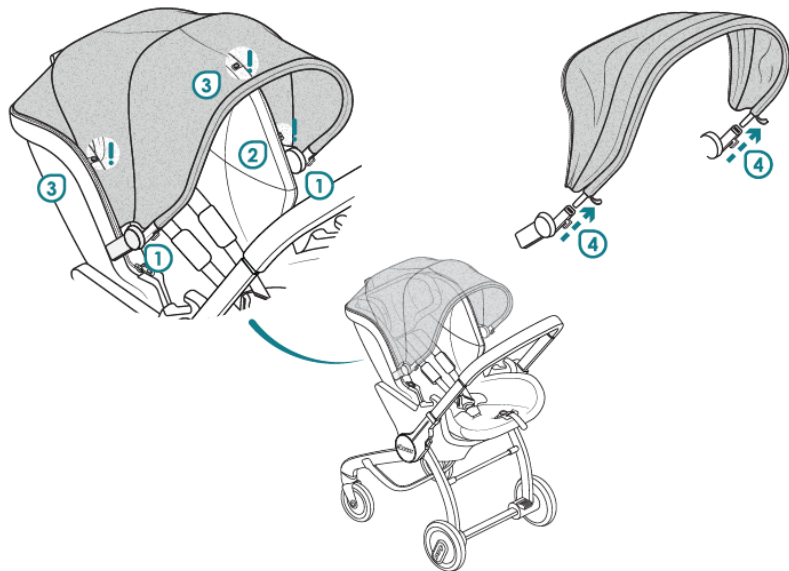

13.3. Headrest cover and shoulder pads removal

STEP 1: Pull open the snaps in each shoulder pad, then pull the snaps attaching the shoulder pads to the headrest cover.

STEP 2: Remove the headrest cover.

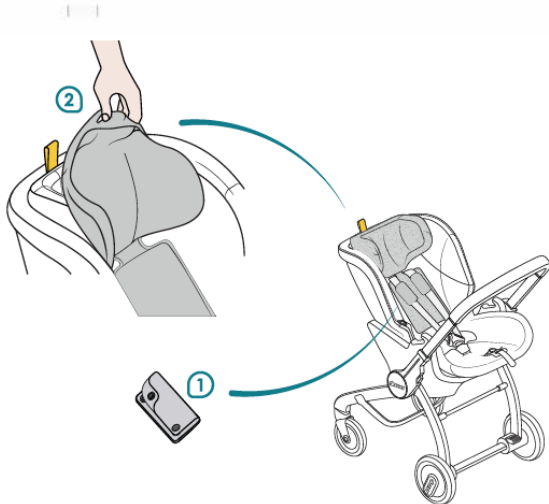

13.4. Removing the Backrest cover


STEP 1: Make sure that the stroller is in the “Lean back” position. Pull out the Backrest cover snaps from the Doona X car seat sides.

STEP 2: Unzip the Backrest cover out of the Doona X car seat back.

STEP 3: Pull out the Backrest snaps out of the Legrest cover.



STEP 4: Pull out the Headrest's yellow strap out of the Backrest cover's slot.

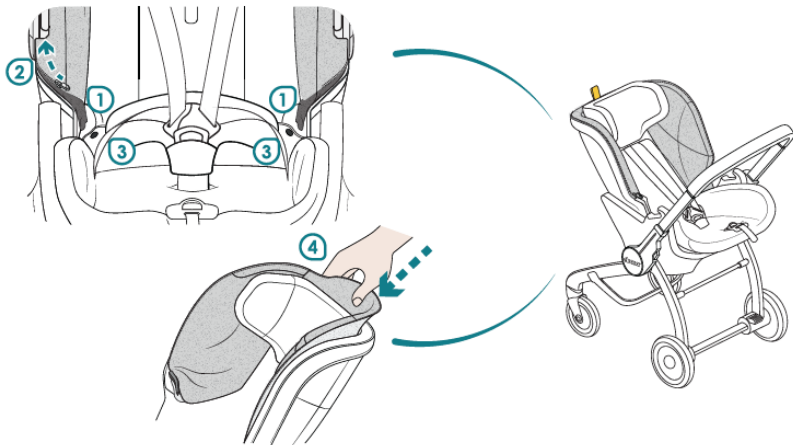


13.5. Removing the Leg Rest cover

STEP 1: Flip the Leg Rest upper part out from the velcro.

STEP 2: Pull out the two snaps from the bottom of the Doona X car seat.


STEP 3: Remove the entire Leg Rest cover out from the Doona car seat bottom part.

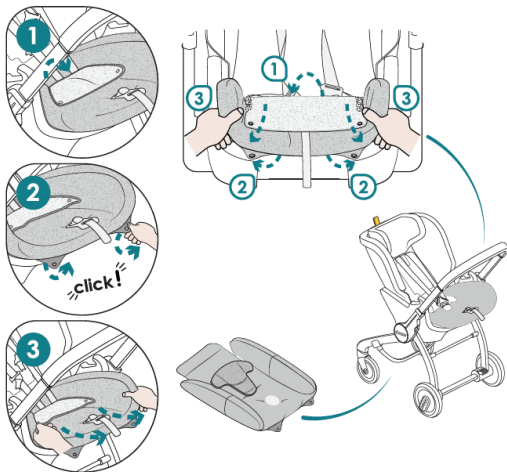

13.6. Installing the headrest and shoulder pads

STEP 1: Place the Headrest cover on the Doona X car seat Headrest.

STEP 2: Insert the yellow strap into the Headrest cover's slot.

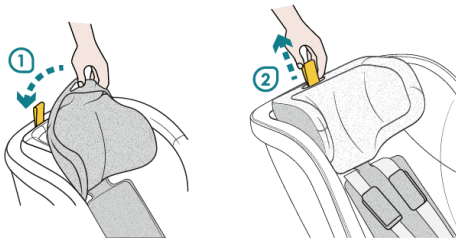


13.7. Installing the Backrest cover



STEP 1: Fit the backrest cover to its position around the headrest and sides then rezip.



STEP 2: Click the snaps back to the Doona X car seat sides.



STEP 3: Click the snaps back to the Legrest cover.

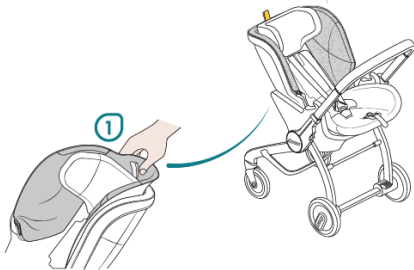

13.8. Installing the Leg Rest cover


STEP 1: Re-fit the seat pad around the harness adjustment button.


STEP 2: Place the cover on the Doona X car seat bottom surface.

STEP 3: Click back the bottom snaps to their position.

STEP 4: Click back the snaps to the Backrest cover and reattach the velcro to it's position.

STEP 5: Pull out the buckle.

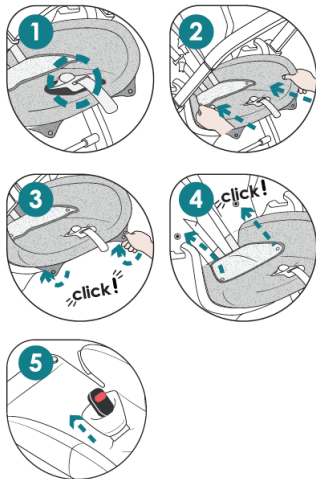

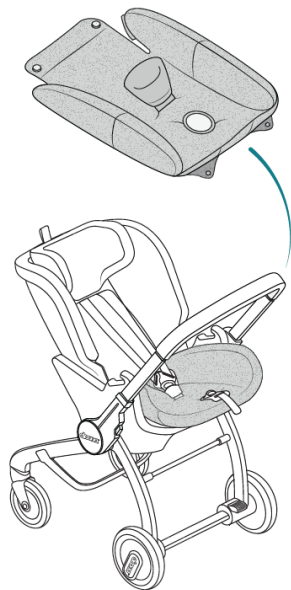

13.9. Installing the sunshade





Before this stage, slide the spine into the sunshade sleeve.



STEP 1: Rezip the sunshade on the Doona X car seat back.

STEP 2: Push the sunshade spine into the canopy hinges.

STEP 3: Click back the sunshade spine to the canopy hinges slots.

STEP 4: Click back the snaps to the canopy hinges.



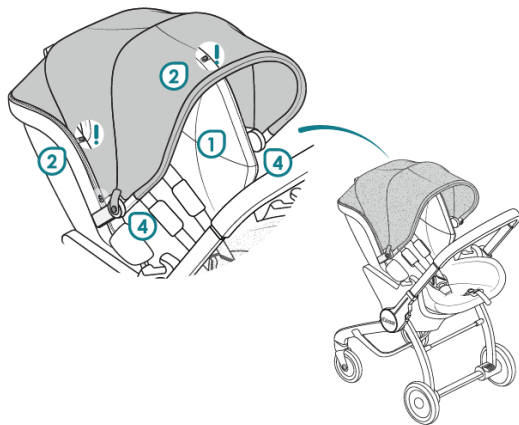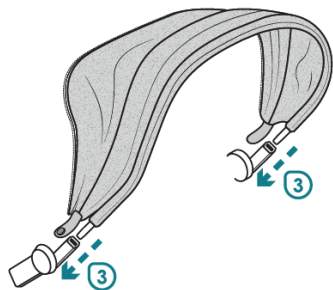

13.10. Cleaning and washing the seat covers

WARNING

- NEVER remove the buckle tongues from the straps.
- Always use only genuine Doona X seat covers, since the seat covers are an integral part of the Doona X Car Seat system.
- Non-regulated products, which are not designed for use with the Doona X Car Seat, can impair the safety and performance of the seat in use or in a crash.
- Always read the care labels before washing any of the Doona X Car Seat parts and accessories.
- The Doona X Car Seat must not be used without the seat covers. The seat covers can be removed and washed with a mild detergent.

Follow these washing instructions to avoid damage to the seat covers:

- Machine wash, cold; Do not bleach; Do not tumble dry; Hang dry;
- Do not wring; Do not iron; Do not dry clean.
- Follow the instructions on the washing label located on the seat covers.
- The same washing instructions should be followed when washing the sunshade and shoulder strap pads.
- The plastic parts can be cleaned using only water with a mild detergent like dish soap.
- Do not use harsh cleaning agents, solvents, or lubricants when cleaning any of the Doona X Car Seat parts and accessories.

13.11. Harness straps and buckle care

The function of the harness, harness buckle, and harness adjuster is imperative for the safety of your child.

- NEVER use lubricants, solvents, soap, bleach, or other household detergents to clean the harness, harness buckle and harness adjuster.
- NEVER use a washing machine or a dryer to clean the harness, harness buckle, and harness adjuster.
- NEVER iron the harness webbing.

If the harness of the Doona X Car Seat must be cleaned, wipe it with a damp cloth or rinse it thoroughly with clean, warm water.

- NEVER disassemble the harness.
- Always read the care labels before washing any of the Doona X Car Seat accessories.

13.12. Replacement parts and storage

Replacement parts are available for the Doona X Car Seat.

- To order replacement parts, contact your local distributor customer service.
- The distributor's contact details can be found at the beginning of this user guide.
- Please keep the model name and serial number available to expedite service.
- When not in use for an extended period of time, make sure to store the Doona X Car Seat in a safe and dry place out of direct sunlight.
- If possible, store the Doona X Car Seat in a large nylon bag, or in its original package, or in the Doona X Travel Bag (sold separately).
- Do not place heavy objects on it.
- Always keep this user guide with the Doona X Car Seat.
- For storing the Doona X Car Seat, engage the handle in position A.

14. Accessories

Doona offers various accessories which have been tested to ensure that their use does not impair the safety or proper function of the Doona X Car Seat. Instructions and warnings are provided with each accessory.

WARNING

- DO NOT use the Doona X Car Seat accessories before reading all warnings and instructions provided with them.
- DO NOT use accessories which were not specially designed or approved by Simple Parenting for this Car Seat.
The use of accessories, which are not customized for the Doona X Car Seat, might cause it to fail Federal Safety Standards or not perform as intended in a crash.
- NOT all of the Doona X Car Seat accessories are approved for use in a vehicle. For information about suitability, read warnings and instructions provided with each accessory or visit our website at www.doona.com/accessories

15. Two-year warranty

We guarantee that the Doona X Car Seat was manufactured in accordance with the US safety standards and regulations, and it meets the highest standards of quality. For the Doona X Car Seat we provide a 2-year warranty against manufacturing or material defects. The warranty period is effective from the day of purchase.

As proof of purchase we ask that you fill out the Warranty Card and retain it for the whole term of the warranty period, together with your sales receipt.

In case of a warranty claim, the Warranty Card must be returned together with the product to your local distributor.

Please also register your Doona X Car Seat online at: www.doona.com/register.

The Warranty will cover a Doona X Car Seat which has been handled properly.

The warranty is valid only with Simple parenting's replacement components for this product. Simple Parenting reserves the option to provide repair or replacement components for this product.

The warranty does not apply in the following cases:

- The product shows normal signs of wear and tear.
- Damage occurred as a result of exposing the product to excessive stress.
- Damage occurred as a result of inappropriate or improper use.
- The product has been used for a purpose other than that specified in this user manual.

- Damage occurred as a result of use of accessories or parts not made by Simple Parenting for use with the Doona X Car Seat.

In the event of a warranty claim, please contact your local distributor:

Customer Service Tel: +1 (844) 477-9539

E-mail: info.usa@doona.com

16. Warranty card

Please add your details below

Name: _____ Product serial number : _____

Address: _____ State: _____

Zip Code: _____ Retailer (store where purchased): _____

City/Town: _____ Receipt number: _____

Telephone No.
(Including area code): _____

E-mail address: _____ **Note: Keep the receipt together with the warranty card**